


Nadeln für HS6 / "TF 6 / HIF 44		Dicke der Nadel an Meßpunkt				16 Am Lag			
Nadeltyp	Anwendungsbeispiel	4	8	12	16	4	8	12	16
AAP	Serie Inno Cooper	811	750	710	670	x			
AAD	998 St2 2xHS2	807	740	700	660	x			
ADH		811	721	680	640	x			
ABP	Serie 1098	808	722	659	607	x			
AAZ	998 2HS2	805	718	655	595	x			
ADE		807	715	657	589	x			
ABB		807	725	657	589	x			
AAR	Serie 1001	795	686	625	584	x			
ABS		814	728	656	580	x			
AAC	Serie 998 Mayfair	811	720	631	550	x			
AAL		800	680	590	550				
AAS		802	688	612	542				
ABQ		803	707	615	530				
AAJ	1275 St2 2xHS4	812	716	600	520				
AAH		812	705	593	490				
AAW		810	715	590	470				
AAA		785	630	540	460	x			
ADL		812	678	557	455	x			
AAB	1275 FullRace 2xHS4	785	610	493	448	x			
AAM	998/LCB/RC40/Torq/bleifrei	785	630	519	448				
AAU	998/LCB/RC40/Torq/KN	806	675	560	440	x			
ABD	2HS4 Race	803	675	560	440	x			
ABY	998/ST3/LCB/RC40/Torq/KN	798	621	493	429	x			

Nadeln für HS6 / "TF 6 / HIF 44		Dicke der Nadel an Meßpunkt				16 Am Lag			
Nadeltyp	Anwendungsbeispiel	4	8	12	16	4	8	12	16
BEJ	Serie 1275 60PS	908	813	770	730	x			
BAU	Serie 1275 Inno 120L	893	780	752	728	x			
BAT		887	790	715	655	x			
BAV	998/Stufe II	909	757	667	625	x			
BBX		905	806	702	598	x			
BCJ		909	740	630	580	x			
BAX		896	742	652	570	x			
BAY		895	742	652	570	x			
BAN		905	790	668	548				
BAR	1098/Stufe II	895	790	668	548				
BBZ	1400/276"/St3	892	751	629	540	x			
BDL	1275/RC40/Torque/K&N	893	774	650	530	x			
BFY	Serie 1275 Cooper	897	774	650	530				
BAF		905	768	646	523	x			
BCK		903	768	646	523	x			
BCE	1275/St2/RC40/KN	872	740	615	495	x			
BAP		899	757	618	482	x			
BBA		899	757	618	482	x			
BBW		905	750	610	470	x			
BCF		899	739	533	444				
BBC	1275/276"/RC40/Swift	902	752	487	420	x			
BDK	1400/300"/Race/YS	899	739	533	412	x			
BDR	1400/276"/1.5/St3/RC	895	760	580	400	x			

SPRING LOADED FIXED

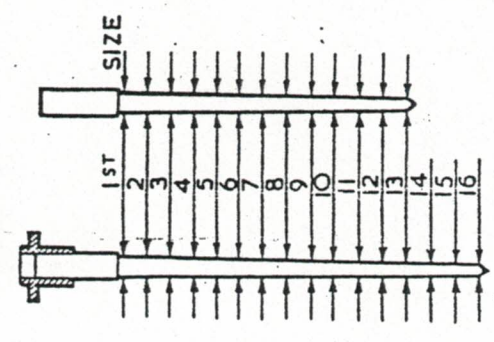

Sizes taken every 1/8" from top shoulder
 Spring loaded type for .090in & .100in dia Jets
 Fixed type for .090in, .100in & .125in dia Jets

MINI CENTER LIMBURG / HOPE IMPEX		Technische Info				Nadeln1.TB			
Nadeltyp	Anwendung	4	8	12	16	4	8	12	16
EB	1100 2HS2 Std	815	750	710	670	x			
GY	998 Cooper Std	812	740	700	660	x			
M5		792	729	680	640	x			
M	2HS2 998 Cooper fett	808	726	650	595	x			
DZ	1 HS4 1275 Std	795	700	640	600	x			
AF	2HS2 1275 ca.270"	780	695	632	580	x			
No. 3	2HS4 268" 1275	785	703	630	570	x			
AH2	2HS2 1275 S Std	794	704	620	560	x			
E3		803	693	600	550	x			
No. 6	2HS2 1070 268"	785	666	550	510	x			
No. 7	1 HS4 1275 268"	785	655	520	495	x			
CP4		790	636	510	430				
MME	2HS4 300" 1071	780	636	495	430				
BG	2HS4 300"	782	600	430					